



General

Quaddrix is proud to introduce the new generation of QT-Zeus II DVR and QT - 600 DVR, the perfect choice for solutions where you need high performance in a powerful stand alone DVR.

Functions

H.264 Video compression:

As the most efficient video compression standard currently available, H.264 offers the best quality video, while dramatically minimizing the burden of your network bandwidth and storage space for all video files.

By incorporating H.264 encoder technology, we reduce the size of a digital video file by more than 80% compared with the Motion JPEG format and as much as 50% more than with the MPEG-4.

Pentaplex function: It allows the following functions to be performed at the same time: live display, record, playback, backup and network operation (remote access).

HDMI video out: High Definition Multimedia Interface compatible with high definition monitors, to offer superior digital video and audio quality through user-friendly connector, which avoids the maze of cabling on installations.

Models available: 4, 8, and 16 channel.

Real time live preview: Able to display up to 16 channels (depending on the model) in real time with 720P high definition.

DVR ZEUS II SERIE DVR QT - 600 SERIE



• **H.264 Video Compression**



• **Pentaplex**



• **HDMI video out**



• **Real time live preview**



• **eSATA out**



• **SoftQ Professional compatible**

softQ Basic software included: allows you to preview, manage and record network video from our openQ IP line of cameras. Up to 250 devices

Full PTZ control: Able to control PTZ devices through RS485 serial bus.

Smart video detection and camera settings: Motion detection, camera masking and video loss detection in all channels.

E-Mail function with attached snapshots: Now you can send E-Mail messages triggered by any event with attached pictures. This function strengthens the remote characteristics and benefits of this system.

pocketQ application: Allows iPhone users with this remote access application to monitor anywhere at anytime from their mobile devices.

eSATA Out: External SATA connection for backup.

Multiple channel playback: Able to make playback on 1/2/4/16 channels simultaneously.

Up to 16 audio input channels: 1 audio input per video channel providing a maximum of 16 audio inputs (depending on the DVR model).

Compatibility with SoftQ Professional: This is our powerful video management software (VMS solution), designed for high end surveillance systems which when teamed with our smartQ video analytics application will also deliver improved performance of your security system.


Product variations; DVR models table.

DVR	ZEUS II	Qt 600
04N-S	4ch video ,4ch audio,4ch looping, 1ch matrix, HDMI, eSATA	
	Up to 8 SATA HDD's (without CD-RW/DVD-RW) 4ch playback,4CIF/120FPS	1 ch audio out + 1 bidirectional audio channel, 4 SATA HDD's (without CD-RW/DVD-RW), CIF@30Fps in all channels, D1@30Fps in Channel 1 only
08N-S	8ch video ,8ch audio,8ch looping, 1ch matrix, HDMI, eSATA	
	Up to 8 SATA HDD's (without CD-RW/DVD-RW), 8ch playback,4CIF/240FPS	1 ch audio out + 1 bidirectional audio channel, 4 SATA HDD's (without CD-RW/DVD-RW), CIF@30Fps in all channels, D1@30Fps in Channel 1 only
16N-S	16ch video ,16ch audio,16ch looping, 1ch matrix, HDMI, eSATA	
	Up to 8 SATA HDD's (without CD-RW/DVD-RW), 16ch playback,4CIF/480FPS	1 ch audio out + 1 bidirectional audio channel, 4 SATA HDD's (without CD-RW/DVD-RW), CIF@30Fps in all channels, D1@30Fps in Channel 1 & 9 only

Parts included

- Utilities CD ROM
- Accessories box with: USB mouse, network cable, looping, audio and matrix cable, rack adapters, IR remote control, HDD mount screws and SATA Cables
- Printed manual

Technical Drawing

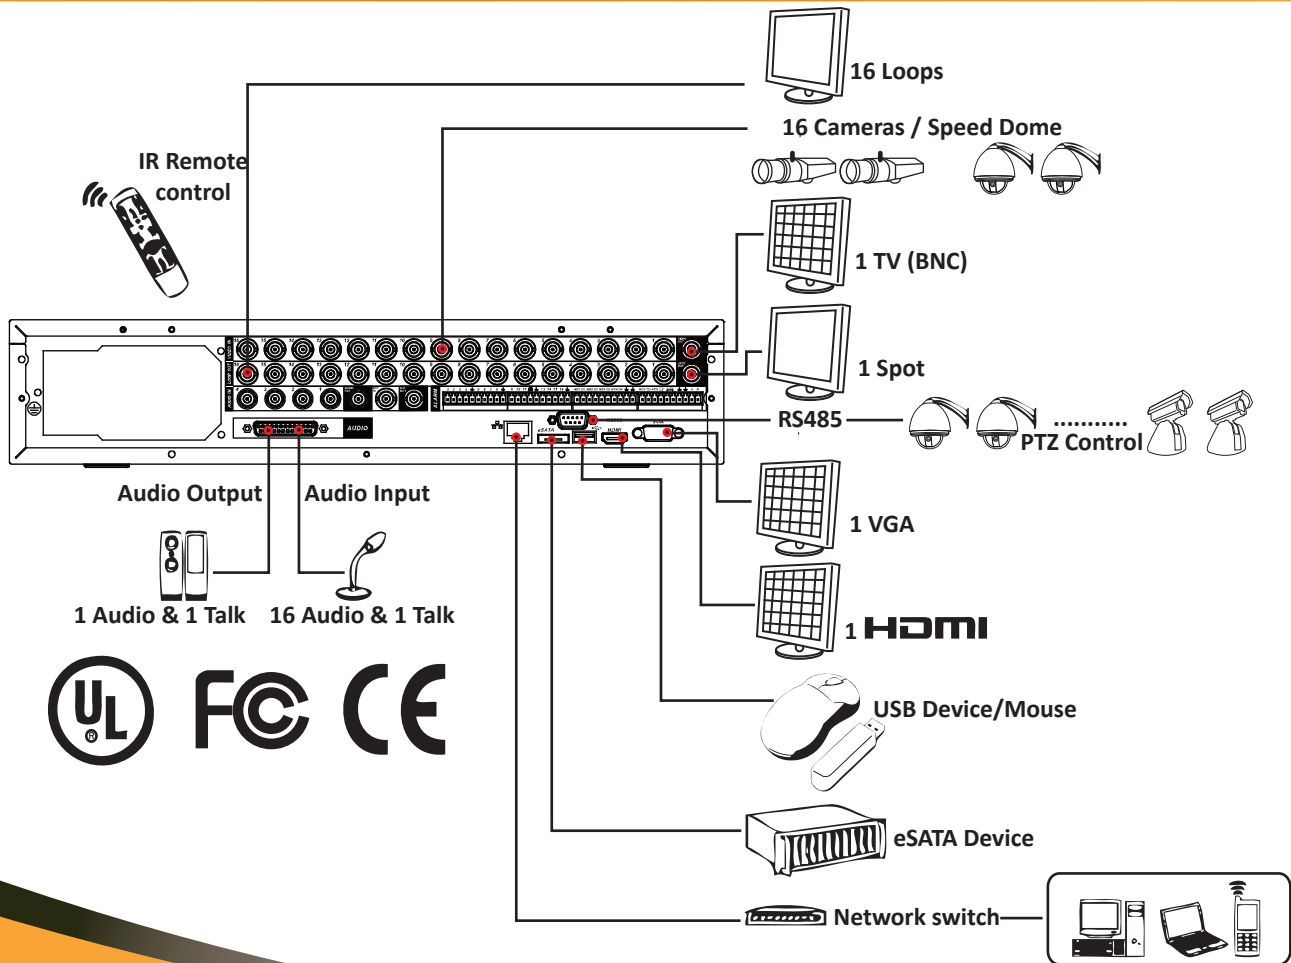

Technical specifications:

COMPRESSION AND SYSTEM PERFORMANCE

Video compression:	H.264
Stream type:	video, Video & audio stream
Dual Stream:	Yes
System resources:	Pentaplex (live, recording, playback, backup & remote access)
Operative system:	Embedded Linux Based O.S.
User Interface:	GUI, with on-screen menu tips
Control modes:	Front panel, USB mouse, Quaddrix Multi KB controller, IR remote control, remote from web, SoftQ Professional & Basic software
System status:	HDD status, data stream statistics, log record, bios version, on-line user
Motion Detection:	Yes, Zones: 396 (22*18) detection zones.
Sensitivity:	1~6 (level 6 is highest) Trigger recording, PTZ movement, tour, alarm, email, matrix output.
Video Loss:	Yes, Trigger recording, PTZ movement, tour, alarm, email, matrix output
Camera Masking:	Yes, Trigger recording, PTZ movement, tour, alarm, email, matrix output

Network

Network protocols:	TCP/IP, UDP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP
Board band transmission:	Yes
Narrow band transmission:	Yes
Remote PTZ control:	Yes
Remote operation:	Monitor, PTZ control, playback, system setting, file download, log information, and complete system management.
Dual streaming:	Yes

STORAGE FUNCTIONS

DVR:	ZEUS II	QT 600
HDD:	8 SATA ports, 8 HDDs supported (up to 2TB each), eSATA port	1 SATA ports, 1 HDD supported (up to 2TB each)
HDD management:	Hard disk hibernation technology, HDD faulty alarm	
Space Occupation:	Audio: 14.4MB/h Video: 56~500MB/h	
Recording modes:	Manual, continuous, video detection (including motion detection, camera blank, video loss), Alarm	
Other:	Supports cyclic and non-cyclic mode; Support Network Attached Storage (NAS) and FTP video upload; Support USB Flash Disk, USB Hard Disk, USB CD-RW for backup	

Technical specification

QT-ZEUS II-04N-S

QT-ZEUS II-08N-S

QT-ZEUS II-16N-S

Video input	4 Channels BNC (BNC, 1.0Vp-p, 75Ω)	8 Channels BNC (BNC, 1.0Vp-p, 75Ω)	16 Channels BNC (BNC, 1.0Vp-p, 75Ω)
Looping out	4 Channels BNC (BNC, 1.0Vp-p, 75Ω)	8 Channels BNC (BNC, 1.0Vp-p, 75Ω)	16 Channels BNC (BNC, 1.0Vp-p, 75Ω)
Video output	1 channel TV output BNC 1.0Vp- p 75Ω, 1 Spot BNC 1.0Vp- p 75Ω 1 VGA output, 1 HDMI output		
Video standart	PAL (625Line, 50f/s), NTSC(525Line, 60f/s)		
Video compression	H.264		
Matrix out	1 Channel BNC (BNC, 1.0Vp-p, 75Ω)		
Video resolutions	Format	NTSC	PAL
	D1	704x480	704x576
	HD1	352x480	352x576
	2CIF	704x240	704x288
	CIF	352x240	352x288
	QCIF	176x120	176x144
Video recording	4CIF/CIF/QCIF:PAL 1f/s-25f/s NTSC 1f/s-30f/s; Dual encoding streams supported		
Video display split	Full and multiple screen display, 1/ 4/ 9 / 16		
Tour display	Supported		
Image quality	1~6 level (level 6 is the best)		
Camera lock	Yes, Camera locked for users		
Camera adjustment	Adjust color according to different time period		
Video information	Camera title, time, video loss, camera lock, motion detection, recording		
TV output adjustment	Adjust TV output color & display zone		
Audio inputs	4 channels, BNC, 200-2800mV, 30KΩ	8 channels, BNC, 200-2800mV, 30KΩ	16 channels, BNC, 200-2800mV, 30KΩ
Audio outputs	1 channel, BNC, 200-3000mv, 5KΩ 1 channel Output, BNC(200-3000mV, 5KΩ) for bidirectional talk audio		
Audio compression	G. 711		
HDD interfaces	8 SATA ports, 8 HDDs supported, or 6HDD with CD/DVD-RW, plus 1 eSATA port		
Recording priority	Manual>Alarm>Video Detection>Continuous		
Search mode	Time/Date, Alarm, Motion Detection & exact Search (accurate to second)		
Playback	16 channel playback simultaneously, pause, stop, rewind, fast play, slow play, next file, next camera, previous camera, full screen, repeat, shuffle, backup selection		
Digital zoom	Selected zone can zoom into full screen during playback		
USB interface	Yes 2 ports, 1 for mouse control, 1 for backup		
eSATA	Yes 1 port for backup		
RS232	Yes, for Quaddrix multi KB keyboard, PC communication		
RS485	Yes for PTZ control		
Power supply	220V 50Hz / 110V 60Hz		
Power consumption	25W	30W	40W
Working temperature	-10°C ~ +55°C		
Working humidity	10%~ 90%		
Atmosphere pressure	86kpa ~ 106kpa		
Dimension	1.5U, 440mmx460mmx89mm (W*D*H)		
Weight	6.5 KG (without HDD)		
Mounting	Desktop or Rack		

Technical specification

QT-600-04N-S

QT-600-08N-S

QT-600-16N-S

Video input	4 Channels BNC (BNC, 1.0Vp-p, 75Ω)	8 Channels BNC (BNC, 1.0Vp-p, 75Ω)	16 Channels BNC (BNC, 1.0Vp-p, 75Ω)
Looping out	4 Channels BNC (BNC, 1.0Vp-p, 75Ω)	8 Channels BNC (BNC, 1.0Vp-p, 75Ω)	16 Channels BNC (BNC, 1.0Vp-p, 75Ω)
Video output	1 channel TV output BNC 1.0Vp- p 75Ω, 1 Spot BNC 1.0Vp- p 75Ω 1 VGA output, 1 HDMI output		
Video standart	PAL (625Line, 50f/s), NTSC(525Line, 60f/s)		
Video compression	H.264		
Matrix out	1 Channel BNC (BNC, 1.0Vp-p, 75Ω)		
Video resolutions	Format	NTSC	PAL
	D1	704x480	704x576
	CIF	352x240	352x288
	QCIF	176x120	176x144
Video recording	Main Stream: Channel 1: D1, CIF, QCIF (1~25/30Fps) real time Channels 2~4: CIF, QCIF (1~25/30Fps) real time D1 (1~7Fps)	Main Stream: Channel 1: D1, CIF, QCIF (1~25/30Fps) real time Channels 2~8: CIF, QCIF (1~25/30Fps) real time D1 (1~7Fps)	Main Stream: Channel 1: D1, CIF, QCIF (1~25/30Fps) real time Channels 2~8: CIF, QCIF (1~25/30Fps) real time D1 (1~7Fps)
Video display split	Full and multiple screen display, 1/ 4/ 9 / 16		
Tour display	Supported		
Image quality	1~6 level (level 6 is the best)		
Camera lock	Yes, Camera locked for users		
Camera adjustment	Adjust color according to different time period		
Video information	Camera title, time, video loss, camera lock, motion detection, recording		
TV output adjustment	Adjust TV output color & display zone		
Audio inputs	4 channels, BNC, 200-2800mV, 30KΩ 1 channel Input, BNC 200-2800mV, 30KΩ for bidirectional talk	8 channels, BNC, 200-2800mV, 30KΩ 1 channel Input, BNC 200-2800mV, 30KΩ for bidirectional talk	16 channels, BNC, 200-2800mV, 30KΩ 1 channel Input, BNC 200-2800mV, 30KΩ for bidirectional talk
Audio outputs	1 channel, BNC, 200-3000mv, 5KΩ 1 channel Output, BNC(200-3000mV, 5KΩ) for bidirectional talk audio		
Audio compression	G. 711		
HDD interfaces	4 SATA ports, 4 HDDs supported, or 3 HDD with CD/DVD-RW, plus 1 eSATA		
Recording priority	Manual>Alarm>Video Detection>Continuous		
Search mode	Time/Date, Alarm, Motion Detection & exact Search (accurate to second)		
Playback	16 channel playback simultaneously, pause, stop, rewind, fast play, slow play, next file, next camera, previous camera, full screen, repeat, shuffle, backup selection		
Digital zoom	Selected zone can zoom into full screen during playback		
USB interface	Yes 2 ports, 1 for mouse control, 1 for backup		
eSATA	Yes 1 port for backup		
RS232	Yes, for Quaddrix multi KB keyboard, PC communication		
RS485	Yes for PTZ control		
Power supply	220V 50Hz / 110V 60Hz		
Power consumption	25W	30W	40W
Working temperature	-10°C ~ +55°C		
Working humidity	10%~ 90%		
Atmosphere pressure	86kpa ~ 106kpa		
Dimension	1 U, 375mmx285mmx45mm (W*D*H)		
Weight	2.35 KG (without HDD)		
Mounting	Desktop		